



## myPRO<sup>XL</sup> Smart Professional Dryer

Built for **smart businesses** needing **extra capacity**, **longer durability** and **ultra-speed** on a sensible budget

### Benefits and features

- ▶ **Top durability with 15.000+ cycle lifetime**
  - Built with commercial components and last nearly six times\* longer than domestic dryers
  - Drum supported by five roller bearings for long life
  - Easy to clean, heavy duty lint screen
- ▶ **Faster and more efficient drying process**
  - Larger drying load capacity: 12 kg
  - Larger capacity can handle oversized loads with ease
  - Axial airflow ensures the shortest drying time and extremely low energy usage
- ▶ **Increased flexibility and serviceability**
  - OPL as default, Coin is an optional accessory
  - Optional retrofitable stacking kits for dryer+dryer
  - Extra large door opening for easy loading and unloading
  - Real-time clock for happy hour, promotional pricing
  - Roller supported tumbler with less vibration and noise
  - Front access for easy serviceability

### Accessories

- ▶ **Electronic coinmeter for standard alone coin installation**
- ▶ **Mechanical coinmeter for stacked coin installation**
- ▶ **Retrofitable kits for stacked installation both OPL and coin installation**


\* Compared to domestic machines

### Main specifications at a glance

|                         |      |
|-------------------------|------|
| Drying capacity, kg     | 12   |
| Drum volume, l          | 218  |
| Energy consumption, kWh | 7.21 |

### Dimensions

TE1220E

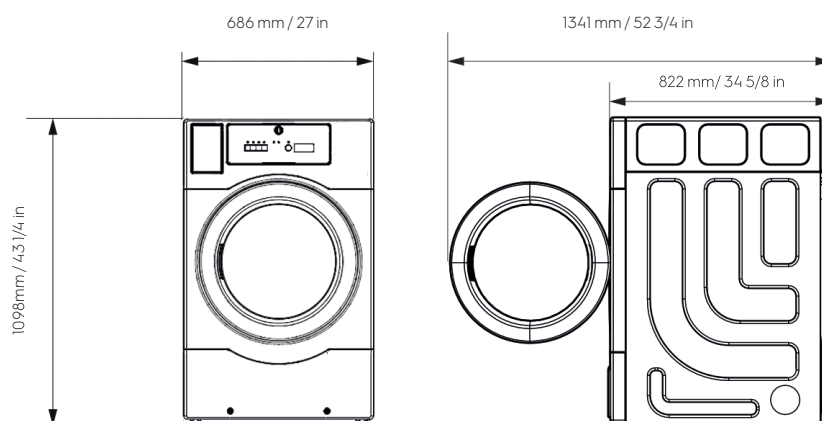

# myPRO<sup>XL</sup> Smart Professional Dryer

## Specifications TE1220E

|                               |                                       |
|-------------------------------|---------------------------------------|
| Heating type                  | Electric, 4.83 kW                     |
| Electrical connection, V/Hz/A | 220-240/50Hz/22                       |
| Type of drying                | Vented                                |
| Air flow (CFM)                | 151                                   |
| Motor (HP)                    | 1/4                                   |
| Declared drying noise, dB(A)  | 68                                    |
| Display                       | LED                                   |
| Filter                        | Filter with handle for easier removal |
| Levelling feet                | 4 adjustable feet                     |

## Connections



|                                 |             |
|---------------------------------|-------------|
| Air outlet diameter (mm/in)     | 99.8/ 3 7/8 |
| Exhaust outlet diameter (mm/in) | 102/4       |

## Programs

|                               |   |
|-------------------------------|---|
| Number of programs            | 4 |
| High / Medium / Low / No heat |   |

## Dimensions

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| Product - WxHxD (mm/in)         | 686x1098x822<br>27x43 1/4 x 32 3/8           |
| Width Door Opening (mm/in)      | 1341/52 3/4                                  |
| Carton - WxHxD (mm/in)          | 770 x 1290 x 880<br>30 3/8 x 50 3/4 x 34 5/8 |
| Weight - product/carton (kg/lb) | 70/86<br>154/190                             |

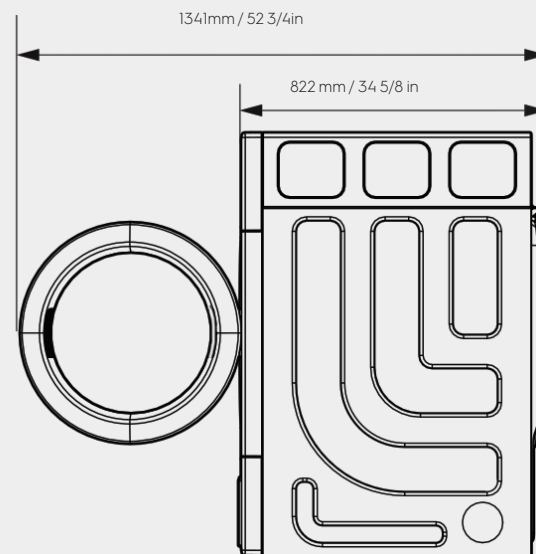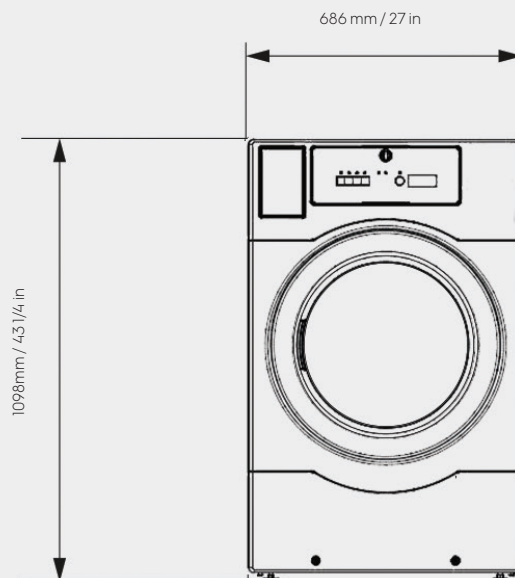

**Electrolux**  
PROFESSIONAL